

# REMO



## HEAVY DUTY AIRLESS SPRAY PAINTING EQUIPMENT



*The range is designed for tough working conditions and suitable for high viscosity, solventless, low solvent coating, semisolid coating, marine coating, etc.*

### FEATURES

- Pneumatically sensed high performance Air Motor
- High Flow Rate
- Stainless Steel rust proof Hydraulic Body
- Easy Maintenance
- Ice Free Motors
- Light and Easy to handle
- Compliance to EC Norms



## ACCESSORIES

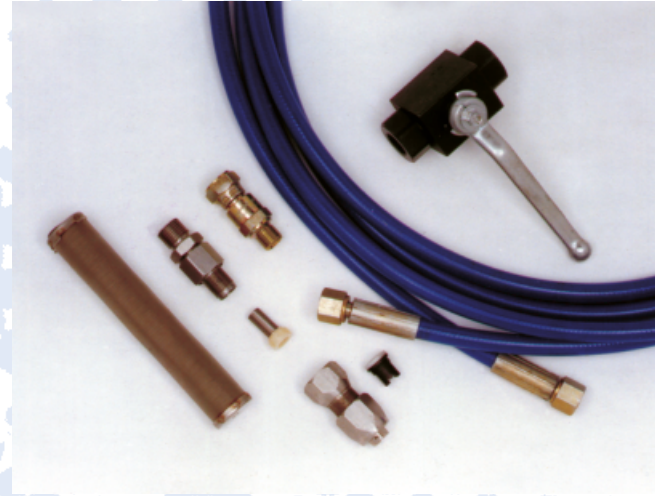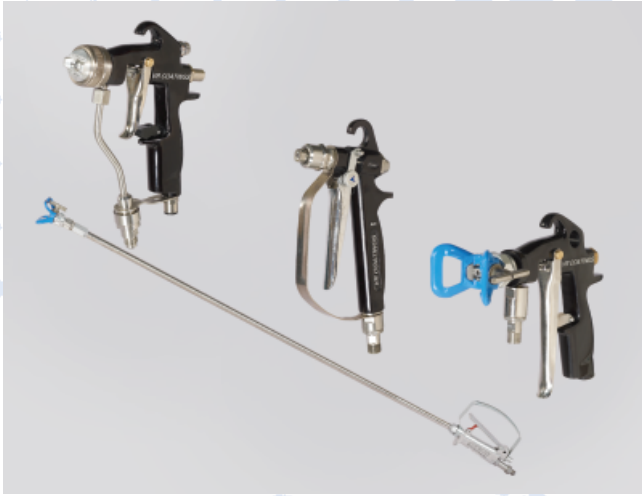

## TECHNICAL SPECIFICATIONS

Type	28.550	30.350	35.275	45.350	50.210	55.275	60.180	60.350	70.150	75.210	75.275	100.210
Ratio*	28:1	30:1	35:1	45:1	50:1	55:1	60:1	60:1	70:1	75:1	75:1	100:1
Output per Cycle	550 cc	350 cc	275 cc	350 cc	210 cc	275 cc	180 cc	350 cc	150 cc	210 cc	275 cc	210 cc
Air Motor Piston Ø	300 mm	250 mm	250 mm	300 mm	250 mm	300 mm	250 mm	350 mm	250 mm	300 mm	350 mm	350 mm
Stroke Length	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm	120 mm
Recommended Spray Volume@ 25 cycles per min	13.75 ltr.	8.75 ltr.	6.8 ltr.	8.75 ltr.	5.25 ltr.	6.8 ltr.	4.5 ltr.	8.75 ltr.	3.75 ltr.	5.25 ltr.	6.87 ltr.	5.25 ltr.
Air Inlet Pressure Max.	7 bar	7 bar	7 bar	7 bar	7 bar	7 bar	7 bar	6 bar	6 bar	6 bar	6 bar	5 bar
Output Pressure Max.	196 bar	210 bar	245 bar	315 bar	350 bar	385 bar	420 bar	360 bar	420 bar	450 bar	450 bar	500 bar
Air Consumption N ltr / min at 25 cycles/min	3400	2400	2100	3400	2100	2700	2100	4100	2100	2700	4100	3500

\*Other ratios and flow on request

 **VR COATINGS PVT. LTD.**

J -138, MIDC Bhosari, Pune - 411 026. INDIA.

Tel.: +91 (020) 30781022 / 27130331 Fax : +91 (020) 30781051

E-mail.: sales@vrcoatings.com • vrcoatings@eth.net • Web : www.vrcoatings.com